


Cable Management



Cable Management Introduction

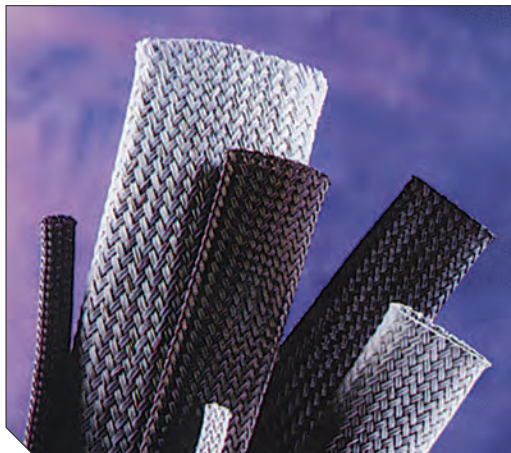


New to this section is Partex Heatshrink. A huge range of sizes and colour combinations available from our massive stocks. All items are stocked in both Bulk rolls and our handy Mini Boxes.

Our adhesive-lined, dual-walled Heatshrink is stocked in handy 1.2m lengths and provides strong, waterproof, jointing and terminations.

All the sizes in our Supaflex braided sheathing are now available in 10 metre packs as well as economical 100m rolls.

Partex Spiral Tubing is a unique, super tough, tubing that protects wires, pipes and cables in many situations.

Heatshrink Tubing



2:1 Ratio Heatshrink Tubing on Rolls

The products listed below are available in the following colours: Black, Clear, Red, Yellow, Blue, White, Green, Brown, Grey and Earth (Green/Yellow). Please specify when ordering.

Specification:

Material: Flame retardant crosslinked Polyolefin.

Voltage: 600V.

Shrink Temperature: 90°C.

Working Temperature: -55°C to 125°C.

Wall Type: Standard.

UL approved.

2:1 Ratio on Rolls

Part No.	As Supplied (Before Recovery) Inside Diameter	After Recovery Inside Diameter	Packaging
HS 212	1.2mm	0.6mm	300m Roll
HS 216	1.6mm	0.8mm	300m Roll
HS 224	2.4mm	1.2mm	150m Roll
HS 232	3.2mm	1.6mm	150m Roll
HS 248	4.8mm	2.4mm	75m Roll
HS 264	6.4mm	3.2mm	60m Roll
HS 295	9.5mm	4.7mm	60m Roll
HS 2127	12.7mm	6.4mm	60m Roll
HS 2191	19.1mm	9.5mm	60m Roll
HS 2254	25.4mm	12.7mm	30m Roll
HS 2381	38.1mm	19.0mm	30m Roll
HS 2508	50.8mm	25.4mm	30m Roll
HS 2762	76.2mm	38.1mm	15m Roll
HS 21016	101.6mm	50.8mm	15m Roll



2:1 Ratio Heatshrink Tubing in Mini Boxes

The products listed below are available in the following colours: Black, Clear, Red, Yellow, Blue, White, Green, Brown, Grey and Earth (Green/Yellow). Please specify when ordering.

Specification:

Material: Flame retardant crosslinked Polyolefin.

Voltage: 600V.

Shrink Temperature: 90°C.

Working Temperature: -55°C to 125°C.

Wall Type: Standard.

UL approved.

2:1 Ratio in Mini Boxes

Part No.	As Supplied (Before Recovery) Inside Diameter	After Recovery Inside Diameter	Packaging
HSMB 12	1.2mm	0.6mm	20m Mini-Box
HSMB 16	1.6mm	0.8mm	17m Mini-Box
HSMB 24	2.4mm	1.2mm	15m Mini-Box
HSMB 32	3.2mm	1.6mm	15m Mini-Box
HSMB 48	4.8mm	2.4mm	12m Mini-Box
HSMB 64	6.4mm	3.2mm	12m Mini-Box
HSMB 95	9.5mm	4.7mm	8m Mini-Box
HSMB 127	12.7mm	6.4mm	8m Mini-Box
HSMB 191	19.1mm	9.5mm	5m Mini-Box
HSMB 254	25.4mm	12.7mm	5m Mini-Box

Heatshrink Tubing 3:1 Adhesive Lined

Dual-Wall (Adhesive Lined) – Black Only			
Part No.	As Supplied (Before Recovery) Inside Diameter	After Recovery Inside Diameter	Packaging
HSDW 3 -3	3mm	1mm	1.2m Length
HSDW 3 -4.8	4.8mm	1.6mm	1.2m Length
HSDW 3 -6	6mm	2mm	1.2m Length
HSDW 3 -9	9mm	3mm	1.2m Length
HSDW 3 -12	12mm	4mm	1.2m Length
HSDW 3 -18	18mm	6mm	1.2m Length
HSDW 3 -24	24mm	8mm	1.2m Length
HSDW 3 -39	39mm	13mm	1.2m Length

Partex HG-1 Electric Heat Gun



Specification:

Operating Voltage: 230-240V, 50Hz
 Amperage: 9A
 Watt: 1800W
 2 Fan Speeds: Low & High

2 Heat Settings:
 Approximately 450°C on Low
 Approximately 600°C on High

HG-1 Electric Heat Gun		
Part No.	Description	Packaging
HG-1	Electric Heat Gun	1


Resettable Thermostat Protection

When the gun is overheated, the thermostat shuts the gun off. After cooling down, the gun automatically turns itself back on. Please be sure to turn off the gun and unplug it before leaving the working area, otherwise it is dangerous and may cause a hazard.

Important Safety Instructions

Warning: This product is a source of very high temperature flameless heat. As with any electrical tool, when using heat tools, always follow safety precautions to reduce the risk of fire, electric shock or personal injury. As with all other heat tools, always keep a fire extinguisher handy and observe all fire precautions.

Partex Spiral Tubing



Product Overview

- Flexible spiral tube for the enclosure & protection of cables, conductors, tubes, wire bundles etc.
- Excellent protection against mechanical wear.
- Suitable for fitting after installation of cables.
- Permits flexible connection between cabinet and door mounted units.
- Reduces cable and line breakdowns, maintenance and downtime costs.
- Also available in halogen-free version.

Specification:

Standard Design

Design: Flexible spiral tube (draw spring type).

Material: Homogenously coloured PVC in accordance with PARTEX formula in cadmium-free quality.

Colours: Standard grey and green. Other colours available on request.

Length: Standard length 1 metre. Lengths up to 3 metres available on request.

Temperature Range: From -20°C to + 60°C.

Resistance: Self-extinguishing, good resistance to chemicals, gamma and UV radiation. For use in extreme environments, contact PARTEX.

Halogen Free Design

Design: Flexible spiral tube (draw spring type).

Material: Noryl EN130.

Colours: Standard cream.

Length: Standard length 1 metre. Special lengths (max. 3 metres) available upon request.


Temperature Range: From -30°C to +120°C.

Resistance: Self-extinguishing in accordance with UL94V0 (1.65). Resistant to oil and most water-based solvents, other cleaning agents, acids and bases. For use in extreme environments, contact PARTEX.

Dimensions in mm (nominal)

Part No.	Internal Diameter (mm)	Carton Qty
SP 10	10	60 x 1 Metre Lengths
SP 15	15	40 x 1 Metre Lengths
SP 20	20	40 x 1 Metre Lengths
SP 25	25	30 x 1 Metre Lengths
SP 30	30	20 x 1 Metre Lengths
SP 40	40	10 x 1 Metre Lengths
SP 50	50	4 x 1 Metre Lengths

Supaflex Braided Cable Sheathing



Product Overview

Supaflex Braided Cable Sheathing is suitable for the enclosure and protection of cables and hoses used in all types of electrical and mechanical installations including power, telecommunications, automotive, marine, aircraft and domestic appliances.

The woven design enables any number of cables to branch out along the assembly. It is easy to use and is best cut with a hot knife or soldering iron thus sealing the end to prevent spraying.

Specification:

A high quality braided cable sheathing, manufactured in polyester, self extinguishing to UL94 VW1. Operating temperature -75°C to +150°C. Wall thickness 0.6mm +/- 0.1mm.

Packaging: Partex Braided Cable Sheathing is available, ex-stock, in economical 100 metre rolls (2 x 50m for SUP 50) or as handy 10 metre packs.

Supaflex is available in Black and Grey colours as standard. Please specify at time of ordering. 24 other colours are also available to special order.

Dimensions in mm (nominal)

Part No.	Nominal Diameter (mm)	Size Range (mm) Minimum	Size Range (mm) Maximum
SUP 4	4	3	7
SUP 6	6	5	10
SUP 8	8	6	14
SUP 10	10	8	16
SUP 12	12	10	18
SUP 15	15	12	22
SUP 20	20	15	27
SUP 25	25	20	35
SUP 30	30	25	45
SUP 40	40	35	60
SUP 50	50	45	73